

# DCA-VD120

## HD-SDI VIDEO DISTRIBUTOR & AMPLIFIER





### Main Features

- 1 input & 2 output 3G/HD-SDI video repeater & distributor
- Adapting Cable Equalizer to return the signal to the original
- Adapting Reclocker to resynchronize the signal
- Adapting Cable Driver to retransmit the signal
- Supported Coaxial Length: 120M+(HD-SDI, 5C-HFBT)



### Dimension

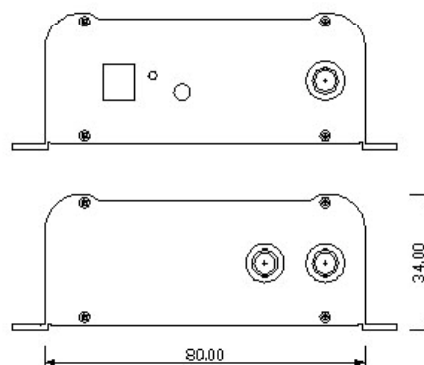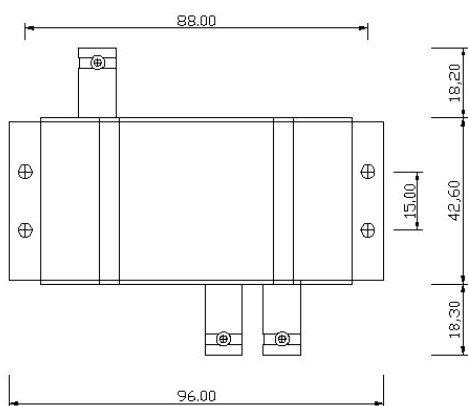

### Specifications

Model	DCA-VD120
Input Signal	SD-SDI, HD-SDI, 3G-SDI (270Mbps ~ 3Gbps )
No. of Input	1ea
Output Signal	SDI
No. of Output	2ea
Video Connector	BNC
Equalizing and Re-clocking	Yes
Supported Coaxial Length	Min.120M ~ Max. 200M (1.5Gbps HD-SDI, Cable: 5C-HFBT)
Power Source	DC 12V
Power Consumption	Less than 1.5Watts (Max. 120mA)
Operating Temp.	0℃ ~50℃ (Humidity :0%RH ~ 80%RH)
Storage Temp.	-20℃ ~80℃ (Humidity :0%RH ~ 85%RH)
Dimension (w/o wings)	80(W) X 34(H) X 42.6(D)mm / 3.15(W) X 1.34(H) X 1.68(D)in
Weight (w/o power supply)	120 g / 0.265 lbs