

# DCS-T940

## HD-SDI STANDARD BOX CAMERA




### Main Features

- 1/2.8" Sony 2.9μm Pixel Progressive Starvis Color CMOS Sensor
- 2Mega Pixels (Max. 1080p)
- C / CS Lens Mountable
- TDN ICR Mechanism Built-in
- WDR / 3D-DNR / DSS (Sens-up) Supported
- OSD Available
- Analog Composite Video Out Available
- HD-SDI Video Out Supporting standard SMPTE protocol
- Pelco-D and ParanTek Serial Protocol Supported (UART Control)



### Dimension

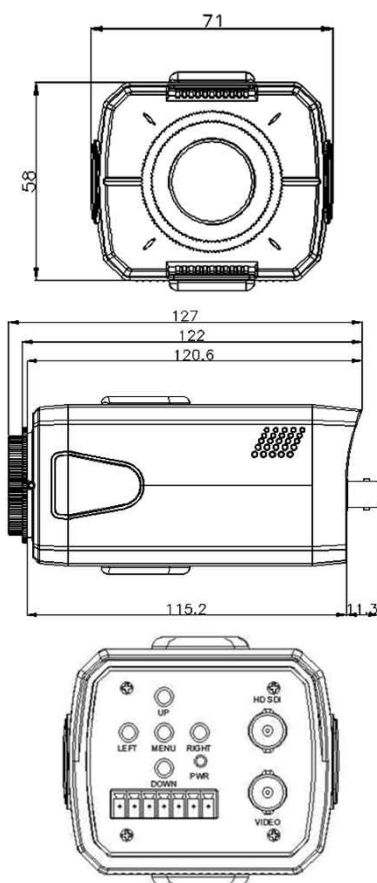


### Option

- Lens (C/CS) – Megapixel
  - 2.8~12mm / 5~50mm
  - Motorized Zoom

### Specifications

Model	DCS-T940
Signal System	HD-SDI (Serial Digital Interface)
Pickup Device	<b>1/2.8" (D-6.46mm) 2.12M Sony CMOS Sensor</b>
Scanning System	Progressive Scan (16:9)
Sync. System	Internal
Total Pixels	2.16MP [1,945(H)x1,109(V)]
Active Pixels	2.12MP [1,937(H)x1,097(V)]
Min. Illumination	<b>0.01Lux (F2.5 - 30IRE),</b> 0.005Lux(ICR on), 0.0003Lux(DSS on)
TDN	<b>ICR Mechanism</b>
Video Out 1 (BNC)	HD-SDI: 1080p25/30, 720p25/30, 720p50/60, 1080i50/60
Video Out 2 (BNC)	Analog CVBS
Lens	Option
Lens (Mount)	C / CS type
OSD	5 push type switches
Camera Title	Off, On(Max. 8 Characters)
Language	English, Chinese(Simplified), Chinese(Traditional), Japanese, Korean
Exposure	DC, Manual
White Balance	AUTO, AUTOext, Preset, Manual
BLC	Off, HLC, BLC, WDR
Day & Night Mode	AUTO, COLOR, B/W, EXT. D&N
Gain Control	AGC (0~10)
Electronic Shutter	1/25(30)~1/25,600(30,000)sec
Noise Reduction	<b>3DNR (Off, Low, Middle, High)</b>
DSS(Sens-up)	<b>X32</b>
Mirror	Off, On(Mirror, Flip, Rotation)
Other Features	Motion Detection (4 Zones), Privacy Mask (16 Zones), ACE, D-Zoom, Defog, Gamma, Shading etc.
Communication	Pelco-D and ParanTek Serial Protocol Supported <b>RS-232C TTL 3.3V (Default: 9600bps, ID1)</b>
No. of Camera ID	Up to 255
Via DI	<b>D&amp;N Change with 3.3V (Day &amp; Night Mode -&gt; EXT)</b>
Power Source	DC12V
Power Consumption	Less than 3 Watts (250mA)
Operating Temp.	-10℃ ~ 55℃ (Humidity :0%RH ~ 90%RH)
Size (mm)	71(W) x 58(H) x 127(D)
Weight	428g (Giftbox Packing)

# DCS-T940 QUICK MANUAL

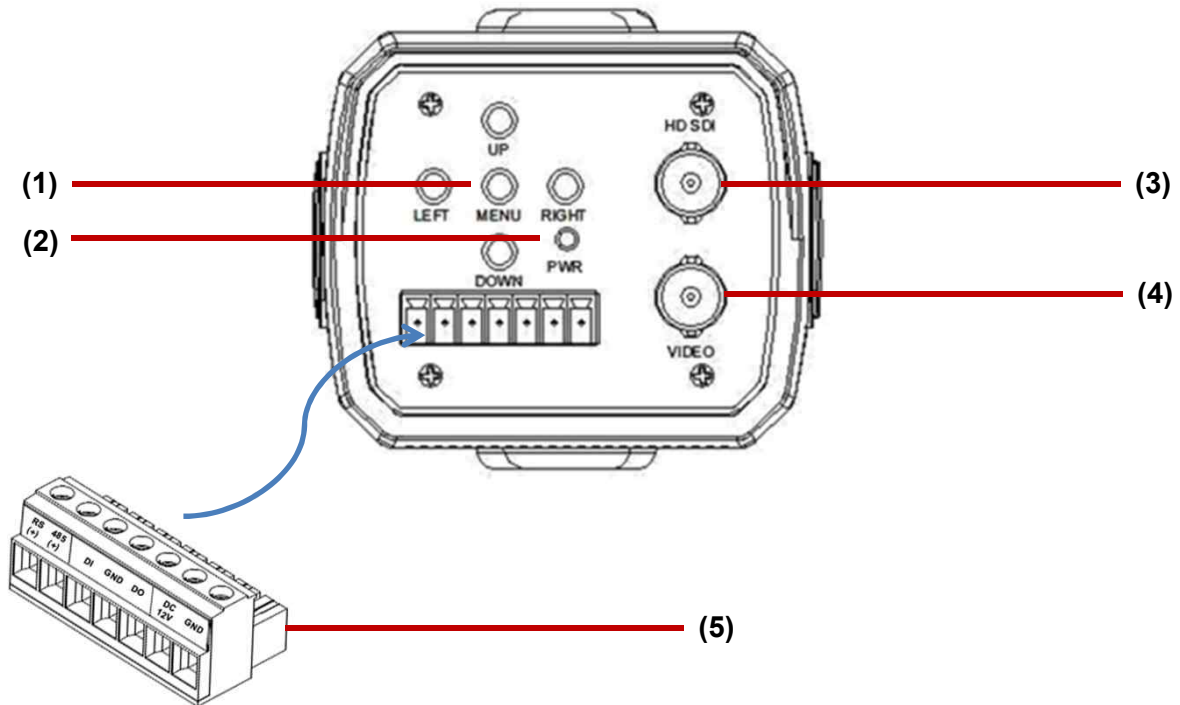

**(1) Function Setup Switch**

By pressing 'MENU' key, display the camera OSD menu on the screen. Use direction keys(UP, DOWN, LEFT, RIGHT) to move the cursor in order to confirm status or changing a selected item.

**(2) Power Lamp**

This green/red lamp is lit when the camera is receiving power normally.

**(3) SDI Video Out Connector**


Sends SDI video signal and connects to the video input terminal of the SDI monitor or SDI DVR

**(4) CVBS Video Out Connector**

Sends CVBS video signal and connects to the video input terminal of the CVBS monitor or CVBS DVR

**(5) Multi-port Terminal**

Connect to the power, Serial port, External D&N port and MD signal out port properly.

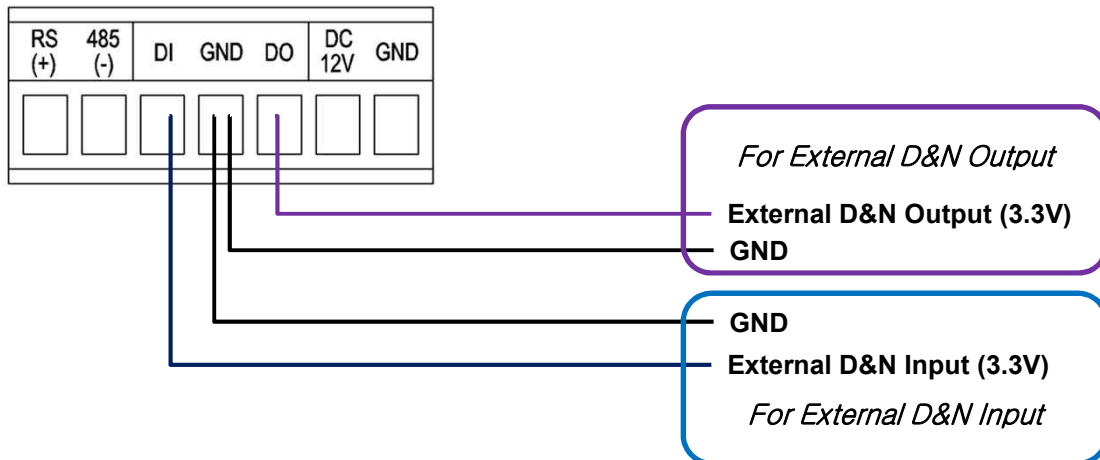

SETUP MENU	SUB MENU 1	SUB MENU 2	SUB MENU 3	VALUE
LENS				MANUAL / DC
ZOOM/FOCUS	FOCUS MODE			<b>AUTO</b> / MANUAL
	D&N FILTER			<b>SYNC OFF</b> / SYNC ON
	ONEPUSH AF			Press ENTER Key
	LENS RESET			Press ENTER Key
EXPOSURE	BRIGHTNESS			0 ~ 20 <b>(10)</b>
	SHUTTER	AUTO	Lens Mode DC	INDOOR / <b>OUTDOOR</b> / DEBLUR
			Lens Mode Manual	<b>NORMAL</b> /DEBLUR
		MANUAL		NTSC : <b>1/30</b> ,60,120,250,500,1K,2K,4K,8K,15K,30K PAL : <b>1/25</b> ,50,100,200,400,800,1.6K,3.2K,6.4K,12.8K,25.6K
		FLICKER		
	SENS-UP			<b>OFF</b> / X2/ X4/ X8 / X16 / X32
	AGC			0 ~ 10 <b>(6)</b>
BACKLIGHT	OFF			
	HLC	LEVEL		0 ~ 20 <b>(10)</b>
		COLOR		<b>BLK</b> ,WHT,YEL,CYN,GRN,MAG,RED,BLU
	BLC	H-POS		0 ~ 20 <b>(6)</b>
		V-POS		0 ~ 20 <b>(5)</b>
		H-SIZE		0 ~ 20 <b>(7)</b>
		V-SIZE		0 ~ 20 <b>(7)</b>
	WDR	WEIGHT		LOW/ <b>MIDDLE</b> / HIGH
DAY&NIGHT	AUTO	D>N THRES		0(bright) ~ 20(dark) <b>(6)</b>
		N>D THRES		0(bright) ~ 20(dark) <b>(8)</b>
		DELAY		0 ~ 9sec, 10sec, 15sec <b>(0 Sec)</b>
		BURST		OFF/ <b>ON</b>
	COLOR			
	B&W	BURST		OFF/ <b>ON</b>
	EXT. D&N	SMART IR		<b>OFF</b> /ON
		SAT. LEVEL		0 ~ 20 <b>(10)</b>
		EXTERN SW		<b>HIGH</b> /LOW
		DELAY		0 ~ 9sec, 10sec, 15sec <b>(0sec)</b>
		BURST		OFF/ <b>ON</b>
WHITE BAL	AWB	AUTO		
		AUTOext		
		PRESET		Press ENTER key
		MANUAL	C-TEMP.	3000K/ <b>5000K</b> / 8000K
			R-GAIN	0 ~ 20 <b>(10)</b>
			B-GAIN	0 ~ 20 <b>(10)</b>
	COLOR GAIN			0 ~ 20 <b>(10)</b>
DNR				OFF/ LOW/ <b>MIDDLE</b> / HIGH
IMAGE	SHARPNESS			0 ~ 10 <b>(8)</b>
	GAMMA			0.45/ <b>0.55</b> / 0.65/ 0.75
	MIRROR			<b>OFF</b> /ON
	FLIP			<b>OFF</b> /ON
	D-ZOOM			1.0X~16.0X <b>(1.0X)</b>
	ACE			<b>OFF</b> /LOW/ MIDDLE/ HIGH

SETUP MENU	SUB MENU 1	SUB MENU 2	SUB MENU 3	VALUE
IMAGE	DEFOG	OFF		
		ON	MODE	AUTO/MANUAL
			LEVEL	LOW/ MIDDLE/ HIGH
	SHADING	OFF		
		ON	WEIGHT	0~100% (100%)
	PRIVACY	BOX	OFF/ON	
			ZONE NUM	0~15
			ZONE DISP	OFF/ON
			H-POS	0~60
			V-POS	0~34
			H-SIZE	0~60
			V-SIZE	0~34
			Y LEVEL	0~20
			CB LEVEL	0~20
			CR LEVEL	0~20
			TRANS	0~3
		POLYGON	OFF/ON	
			ZONE NUM	0~7
			ZONE DISP	OFF/ON
			POS0-X ~POS3-X	0~120
			POS0-Y~POS3-Y	0~68
			Y LEVEL	0~20
			CB LEVEL	0~20
			CR LEVEL	0~20
			TRANS	0~3
MOTION	OFF			
	ON	DET WINDOW	WINDOW USE	0~3
			WINDOW ZONE	OFF/ON
			DET H-POS	0~60
			DET V-POS	0~34
			DET H-SIZE	0~60
			DET V-SIZE	0~34
		SENSITIVITY		0~10 (5)
		MOTION OSD		OFF/ON
		TEXT ALARM		OFF/ON
		SIGNAL OUT		OFF/ON
SYSTEM	COMM	CAM ID		0 ~ 255 (1)
		BAUDRATE		2400,4800,9600,57600,115200
		CAM ID DISPLAY		OFF/ON
	OUTPUT	FRAME RATE		1080_30p(25p), 720_30p(25p), 720_60p(50p), 1080_60i(50i)
		FREQ		50Hz(PAL) / 60Hz(NTSC)
		ANALOG MODE		OFF / CVBS / HD_T / HD_C / HD_A
		CVBS OUT MODE		CUT / FULL
	LANGUAGE			ENG/ CHINESE/ CHINESE(S)/ JAPANESE/ KOR
	CAM TITLE	OFF		
		RIGHT UP		0 ~ 9, A ~ Z, blank
		LEFT DOWN		0 ~ 9, A ~ Z, blank
FACTORY DEFAULT				Reset to factory setting
EXIT				Exit SETUP menu