

# DUB-F2J1-3.6(3.0)

## USB2.0 MINIATURE CAMERA




### Main Features

- 1/2.8" 2.9μm Pixel Progressive Sony Starvis CMOS Sensor
- 2 Mega Pixels – Maximum 1080p (1920x1080)
- Fixed Board Lens (f=3.6mm)
- USB2.0 Compliant
- Best for ATM, Kiosk, POS, Face Recognition, Gaming Applications
- Box Miniature Housing(30x30 type)
- Providing 3M long USB cable & U type swivel bracket



### Dimension

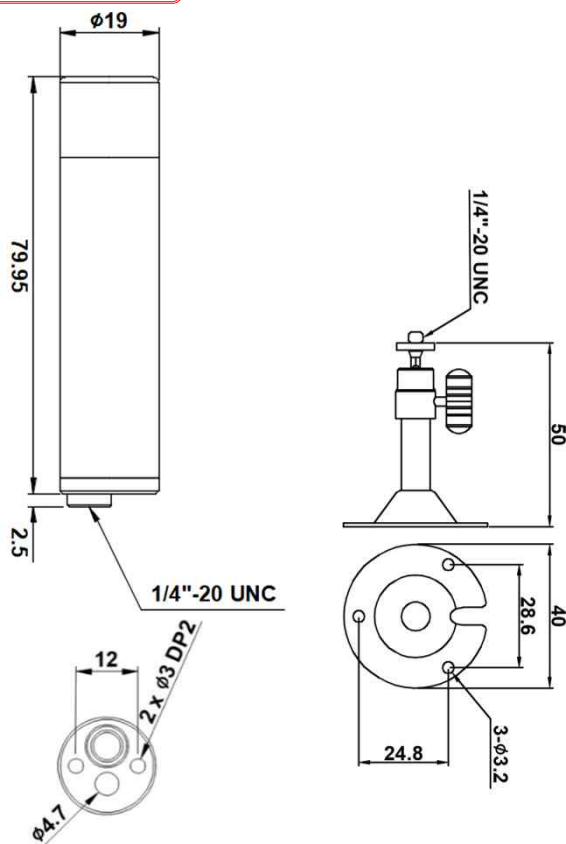

### Option

- Lens  
f=4, 6mm
- Cable: 70cm, 1M
- 1080p50/60: DUB-F2J31-3.6(3.0)

### Specifications

Model	DUB-F2J1-3.6(3.0)
Signal System	MJPEG Encoded
Pickup Device	1/2.8"(D-6.46mm) 2.12M Sony CMOS Sensor
Scanning System	Progressive Scan (16:9)
Sync. System	Internal
Total Pixels	2.16MP [1,945(H)x1,109(V)]
Effective Pixels	2.12MP [1,937(H)x1,097(V)]
Min. Illumination	0.1Lux
H-Resolution	More than 1,000TV Lines(H)
Video Out	MJPEG: 1080p(1920x1080)
Capturing Speed	Max. 25/30fps in MJPEG (50/60Hz)
Lens	Fixed f=3.6mm board type, F2.5
Lens (Mount)	Board Mount(M12)
Angle of View	107.5°(D), 90.5°(H), 51.5°(V)
OSD	N/A
Exposure	Auto
White Balance	Auto
Day & Night Mode	Color (Factory Default)
Gain Control	Auto
Electronic Shutter	Auto
Mirror	Off (Factory Default)
Snap-shot	N/A
Supported O/S	UVC Compatible O/S - Windows, Linux, Mac, Android etc
No. of Camera ID	Up to 2 per PC
Power Source	DC5V via USB
Power Consumption	Less than 0.9 Watts (180mA@DC5V)
Operating Temp.	-10℃ ~ 55℃ (Humidity :0%RH ~ 90%RH)
Size (mm)	19Ø (Bullet Diameter) x 82.45(L)
Weight	198 g (gift-box packing, Including 3M USB Cable)