


DCP-RF940-4

HD-SDI IR-BULLET CAMERA



Dimension

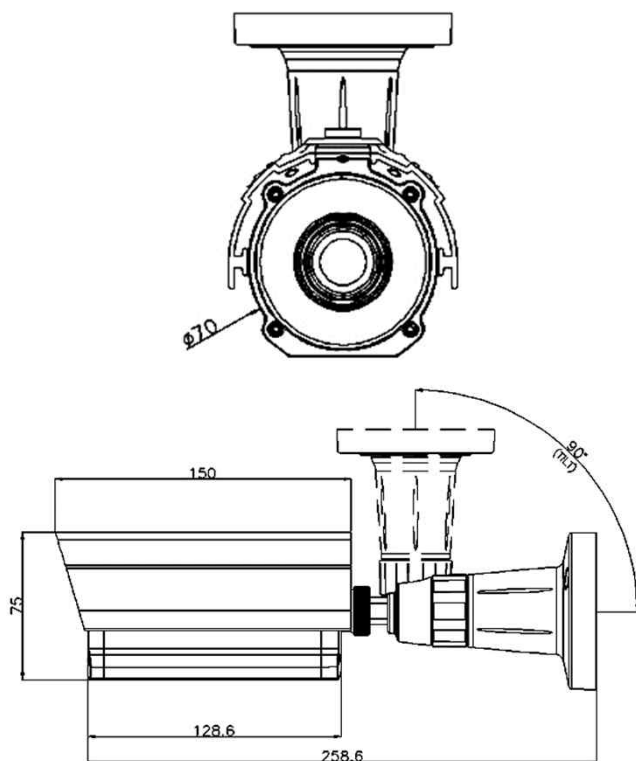

Option

- Lens (f=2.8mm, 3.3, 3.6, 6, 8, 12, 16, 25mm)

Main Features

- 1/2.8" Sony 2.9μm Pixel Progressive Starvis Color CMOS Sensor
- Approx. 2.12 Mega Pixels (Max. 1080p)
- fixed Board Lens (ICR)
- 36pcs of 850nm IR LEDs
- WDR / 3D-DNR / DSS (Sens-up) Supported
- Built-in OSD Switch Board
- HD-SDI and EX-SDI Video Output Supported
- CVBS or AHD, TVI, CVI Video Out can be selectable
- Weather-proof Housing (IP66)




Specifications

Model	DCP-RF940-4
Signal System	HD-SDI (Serial Data Interface) or EX-SDI
Pickup Device	1/2.8"(D-6.46mm) 2.12M Sony CMOS Sensor
Scanning System	Progressive Scan (16:9)
Sync. System	Internal
Total Pixels	2.16MP [1,945(H)x1,109(V)]
Active Pixels	2.12MP [1,937(H)x1,097(V)]
Min. Illumination	0.01Lux(F2.5 – 30IRE), 0Lux(IR on)
No. of IRED	36ea (850nm)
Video Out 1 (BNC)	HD-SDI: 1080p25/30, 720p25/30, 720p50/60, 1080i50/60 EX-SDI: 1080p25/30/50/60, 720p25/30/50/60, 1080i50/60
Video Out 2 (BNC)	Analog CVBS or AHD, TVI, CVI AHD, TVI and CVI: 1080p@25/30 / Analog CVBS: D1
Lens	ICR f=4mm, F2.5
Lens (Mount)	Board type (M12)
Angle of View	92.5°(D), 78°(H), 44.5°(V)
OSD	Via 5-direction OSD switch
Camera Title	Off, On(Max. 8 Characters)
Language	English, Chinese(Simplified), Chinese(Traditional), Japanese, Korean
Exposure	ELC, Manual
White Balance	AWB, ATW, Push Lock, Manual
BLC	Off, HLC, BLC, WDR
Day & Night Mode	AUTO, COLOR, B/W, EXT
Gain Control	AGC (0~10)
Electronic Shutter	1/25(30)~1/30,000sec
Noise Reduction	3DNR (Off, Low, Middle, High)
DSS(Sens-up)	X32
Mirror	Off, On(Mirror, Flip, Rotation)
Other Features	Motion Detection (4 Zones), Privacy Mask (16 Zones), ACE, D-Zoom, Defog, Gamma, Shading etc.
Communication	N/A
Power Source	DC12V
Power Consumption	Less than 4.8 Watts (400mA)
Operating Temp.	-10℃ ~ 55℃ (Humidity :0%RH ~ 90%RH)
Size (mm)	70Ø (Bullet Diameter)
Weight	1,160 g (gift-box packing)

DCP-RF940-4

HD-SDI IR-BULLET CAMERA

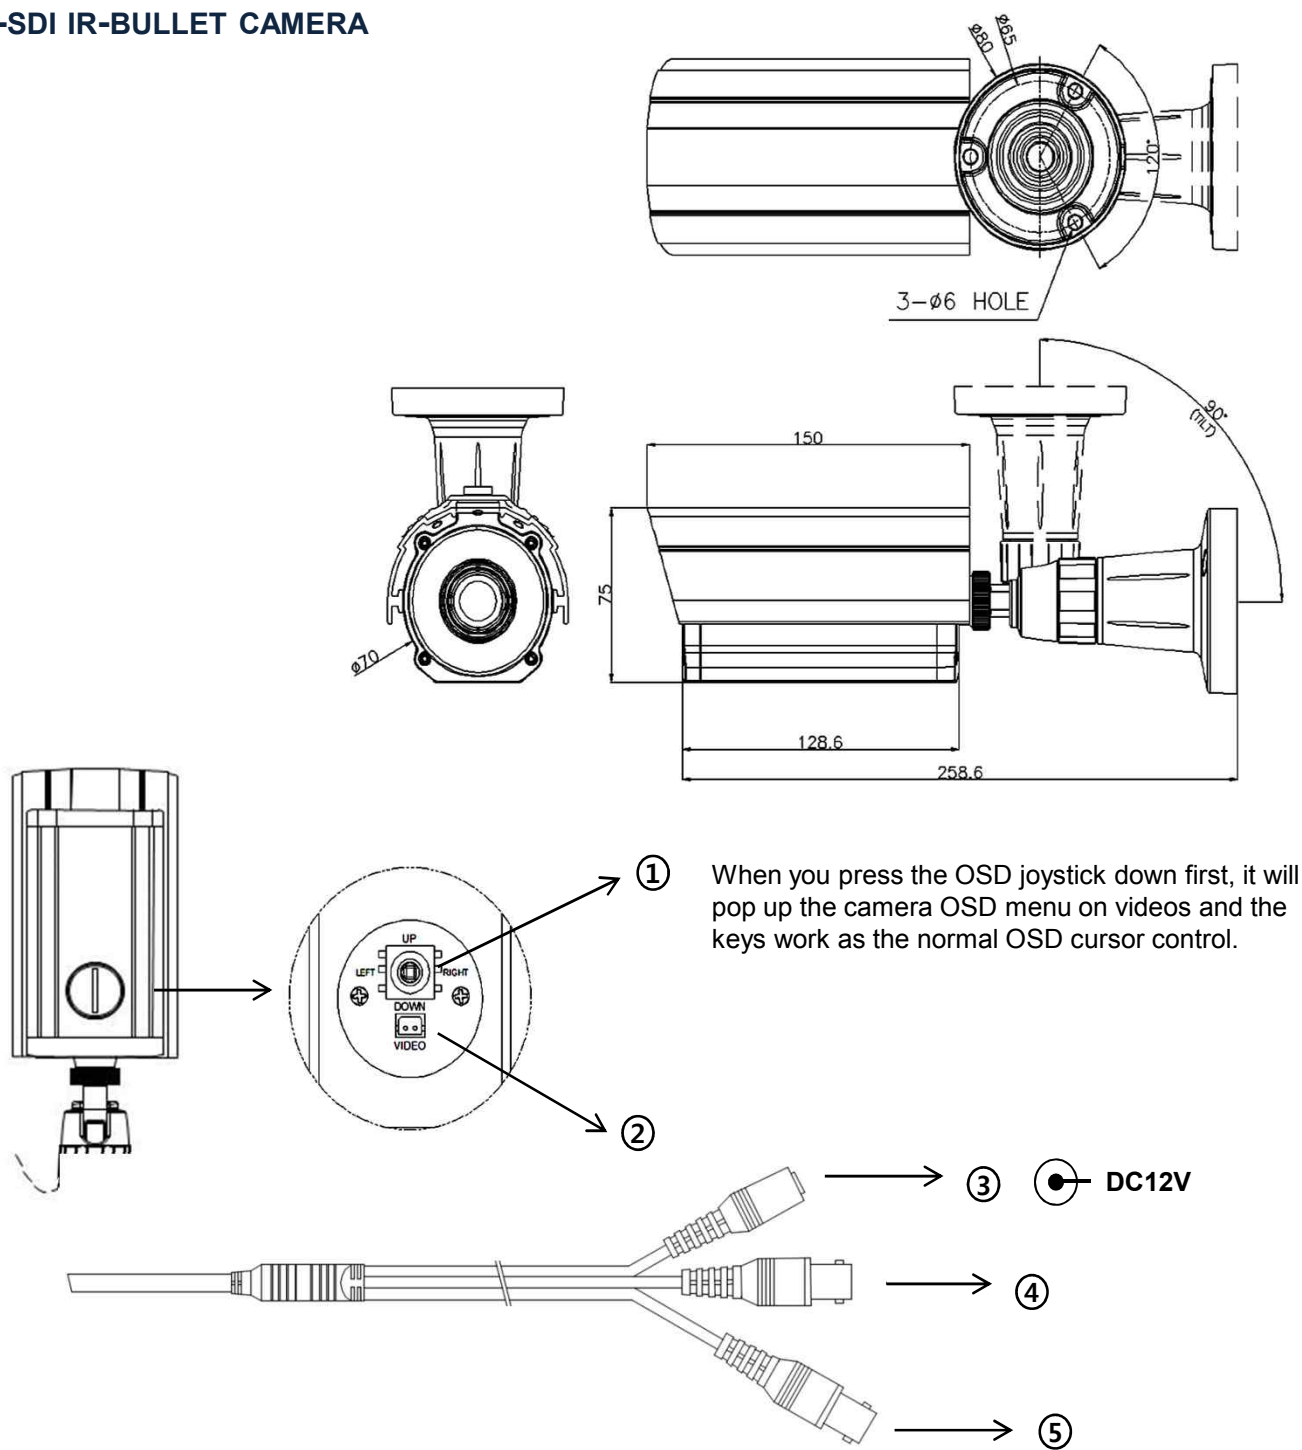

	Function	I/O	Note	Remarks
①	OSD Joystick	N/A	5-directional OSD joystick	Zoom/Focus
②	VIDEO OUT	OUT	2 nd Video signal output	Analog
③	POWER	IN	Camera power input	DC12V
④	VIDEO OUT (Yellow)	OUT	2 nd Video signal output (BNC)	Analog
⑤	VIDEO OUT (Black)	OUT	Video signal output (BNC)	SDI

SETUP MENU	SUB MENU 1	SUB MENU 2	SUB MENU 3	VALUE
LENS				MANUAL / DC
ZOOM/FOCUS	FOCUS MODE			ONESHOT / MANUAL
	D&N FILTER			SYNC OFF / SYNC ON
	ONEPUSH AF			Press ENTER Key
	LENS RESET			Press ENTER Key
EXPOSURE	BRIGHTNESS			0 ~ 20 (10)
	SHUTTER	AUTO	Lens Mode DC	INDOOR / OUTDOOR / DEBLUR
			Lens Mode Manual	NORMAL/DEBLUR
	MANUAL			NTSC : 1/30,60,120,250,500,1K,2K,4K,8K,15K,30K PAL : 1/25,50,100,200,400,800,1.6K,3.2K,6.4K,12.8K,25.6K
	SENS-UP			OFF / X2/ X4/ X8 / X16 / X32
BACKLIGHT	AGC			0 ~ 10 (8)
	OFF			
	HLC	LEVEL		0 ~ 20 (10)
		COLOR		BLK ,WHT,YEL,CYN,GRN,MAG,RED,BLU
	BLC	H-POS		0 ~ 20 (6)
		V-POS		0 ~ 20 (5)
		H-SIZE		0 ~ 20 (7)
		V-SIZE		0 ~ 20 (7)
DAY&NIGHT	WDR	WEIGHT		LOW/ MIDDLE / HIGH
	AUTO	D>N THRES		0(bright) ~ 20(dark) (6)
		N>D THRES		0(bright) ~ 20(dark) (8)
		DELAY		0 ~ 9sec, 10sec, 15sec (0 Sec)
		BURST		OFF/ ON
	COLOR			
	B&W	BURST		OFF/ ON
	EXT. D&N	SMART IR		OFF /ON
		SAT. LEVEL		0 ~ 20 (10)
		EXTERN SW		HIGH/ LOW
		DELAY		0 ~ 9sec, 10sec, 15sec (0sec)
		BURST		OFF/ ON
WHITE BAL	AWB	AUTO		
		AUTOext		
		PRESET		Press ENTER key
		MANUAL	C-TEMP.	3000K/ 5000K / 8000K
			R-GAIN	0 ~ 20 (10)
			B-GAIN	0 ~ 20 (10)
	COLOR GAIN			0 ~ 20 (10)
DNR				OFF/ LOW/ MIDDLE / HIGH
IMAGE	SHARPNESS			0 ~ 10 (8)
	GAMMA			0.45/ 0.55 / 0.65/ 0.75
	MIRROR			OFF /ON
	FLIP			OFF /ON
	D-ZOOM			1.0X~16.0X (1.0X)
	ACE			OFF /LOW/ MIDDLE/ HIGH

SETUP MENU	SUB MENU 1	SUB MENU 2	SUB MENU 3	VALUE
IMAGE	DEFOG	OFF		
		ON	MODE	AUTO /MANUAL
			LEVEL	LOW/ MIDDLE / HIGH
	SHADING	OFF		
		ON	WEIGHT	0~100% (100%)
	PRIVACY	BOX	OFF /ON	
			ZONE NUM	0~15
			ZONE DISP	OFF/ON
			H-POS	0~60
			V-POS	0~34
			H-SIZE	0~60
			V-SIZE	0~34
			Y LEVEL	0~20
			CB LEVEL	0~20
			CR LEVEL	0~20
			TRANS	0~3
		POLYGON	OFF /ON	
			ZONE NUM	0~7
			ZONE DISP	OFF/ON
			POS0-X ~POS3-X	0~120
			POS0-Y~POS3-Y	0~68
			Y LEVEL	0~20
			CB LEVEL	0~20
			CR LEVEL	0~20
			TRANS	0~3
MOTION	OFF			
	ON	DET WINDOW	WINDOW USE	0~3
			WINDOW ZONE	OFF/ON
			DET H-POS	0~60
			DET V-POS	0~34
			DET H-SIZE	0~60
			DET V-SIZE	0~34
		SENSITIVITY		0~10 (5)
		MOTION OSD		OFF /ON
		TEXT ALARM		OFF /ON
SYSTEM	COMM	CAM ID		0 ~ 255 (1)
		BAUDRATE		2400,4800, 9600 ,57600,115200
		CAM ID DISPLAY		OFF /ON
	OUTPUT	FRAME RATE		1080_30p(25p)
		FREQ		50Hz(PAL) / 60Hz(NTSC)
		ANALOG MODE		OFF / CVBS / HD_T / HD_C / HD_A
		CVBS OUT MODE		CUT / FULL
	LANGUAGE			ENG / CHINESE/ CHINESE(S)/ JAPANESE/ KOR
	CAM TITLE	OFF		
		RIGHT UP		0 ~ 9, A ~ Z, blank
		LEFT DOWN		0 ~ 9, A ~ Z, blank
FACTORY DEFAULT				Reset to factory setting
EXIT				Exit SETUP menu