

# KRU-08241CC

## 8CH Stand-alone NVR

### 8CH Stand-alone Network Video Recorder for IP Cameras

- **Maximum 8CH Real-time Recording**
- Monitor / Playback / Record / Network Transfer Simultaneously
- **1 Internal HDD Bay**
- **Acceptable Video Input: IP(upto 8MP-4K)**
- **Max. 8CH POE**
- Video Codec: H.264 & H.265, Audio Codec: PCM
- Embedded Linux Operating System
- P2P(easy mobile network setup with QR code) Supported
- UPNP & Dual Network Streaming Supported
- Compact Case




### Specifications

Software	
Recording Mode	< Fully Programmable > Continuous, Event & Pre-Event Recording modes by Timely and Daily
Network	Dual Streaming (User Selectable)
Recording Quality	Super, High, Medium, Low
Pre-Event	Up to 30 Seconds
Playback Speed	X1, X2, X4, X8, X16, X32, X64, X1/2, X1/4
Backup Format	EXE (Self-executable), AVI
Backup Device	USB
Time Zone Support	Yes
NTP	Yes
DDNS	Dyndns, No-ip, dvrinside.com
UPNP	Yes
P2P	QR Code for easy Network setup
Multi Languages	22 Languages
DVRs on CMS	9 DVRs per CMS PC (Recommended)
Channels on CMS	Unlimited. Max. 144 camera channels per Division Screen for Live and Playback <i>Floating Multiple-windows is supported.</i>
E-Map on CMS	Yes
PTZ Control on CMS	Yes
Multi Floating	Unlimited CMS Window Floating Live Monitoring, Playback, E-map etc.
O/S for CMS	Win 7, 8 and 8.1, Mac Internet Explorer, Safari, Chrome, Firefox <b>&lt;Active-X free CMS&gt;</b>
Smart Phone Apps.	'Mr. patrol' for both Android/iOS
Electrical Information	
Power Source	DC 48V
Consumption	Max. 72W

Hardware	
Video Encoder	H.264 / H.265
Camera Input No.	<b>Max. 8CH (RJ45 w/ POE)</b> (with Onvif 1812 or RTSP Protocol)
Input Video Format	IP (Total Bitrate: Max. 200Mbps) 25Mbps / Channel
Recording Speed	<b>Real Time (Max. 200/240fps)</b> 1280x720, 1920x1080, 2560x1440, 4K(3840x2160)
Playback Speed	Same as recording speed
Video Output	1 x HDMI(Max. 4K), 1 x VGA(1920x1080)
Video Spot Out	N/A
Max. Monitor Res.	Supporting upto 4K videos on monitor
Audio Encoder	PCM
Audio Input No.	1CH (RCA Connector)
Audio Output	1ea (RCA Connector)
Alarm In / Out	8ea / 1ea
USB Port	2 ea (2 x Front)
PTZ Port	1 x RS-485 Terminal Block
e-SATA Port	1ea
POS / ATM	Via USB (USB to Serial)
HDD Bay	1ea
Environmental Condition	
Operating Temp	0°C ~ 40°C
Operating Humidity	Up to 80% RH, Non-condensing
Mechanical Form Factor	
System Dimension	300(W) x 48(H) x 210(D)mm
Package Weight	2Kg (Without HDD)
Package Dimension	430(W) x 100(H) x 270(D)mm

### Dimension

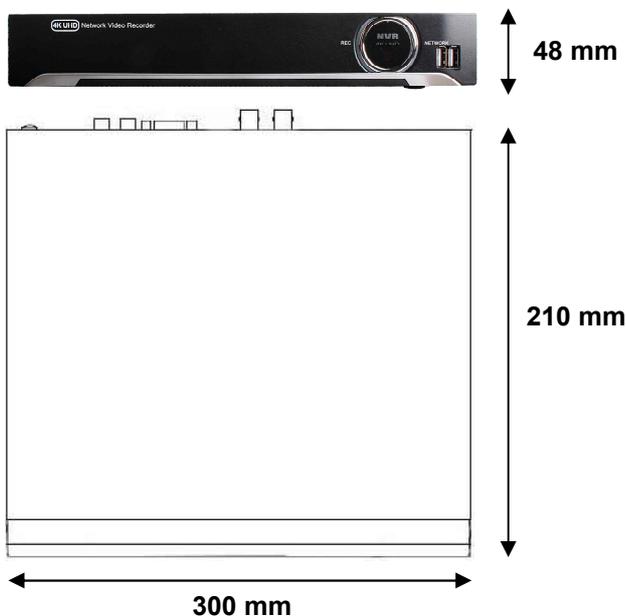

### Screen Shot

